
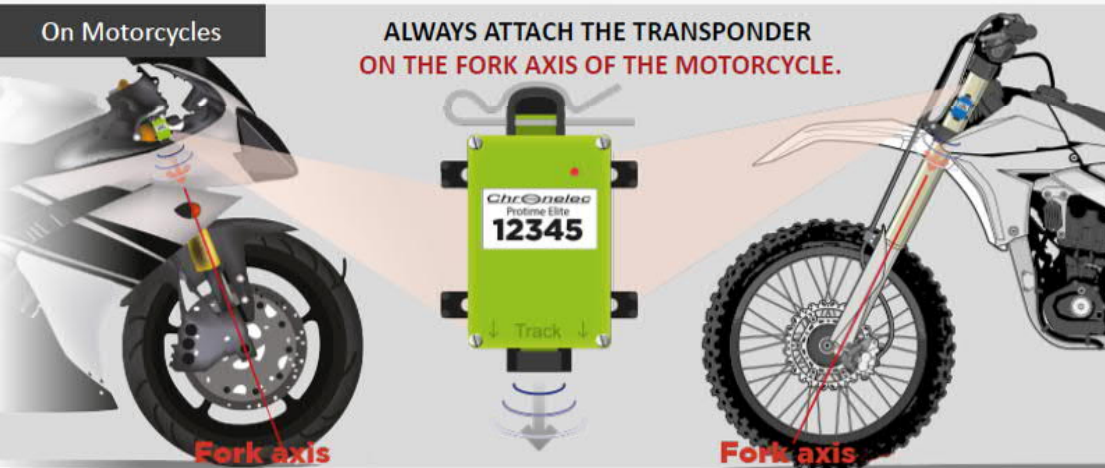
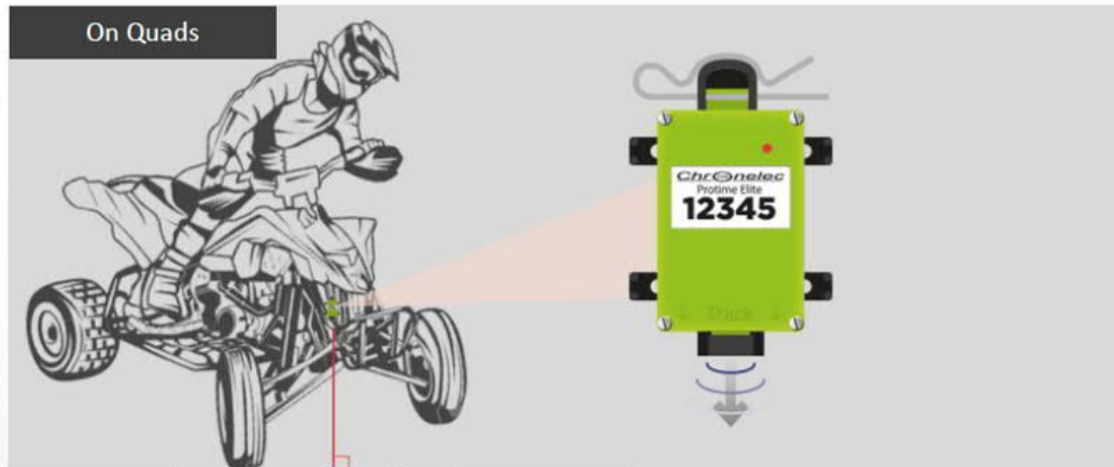


INSTALLATION

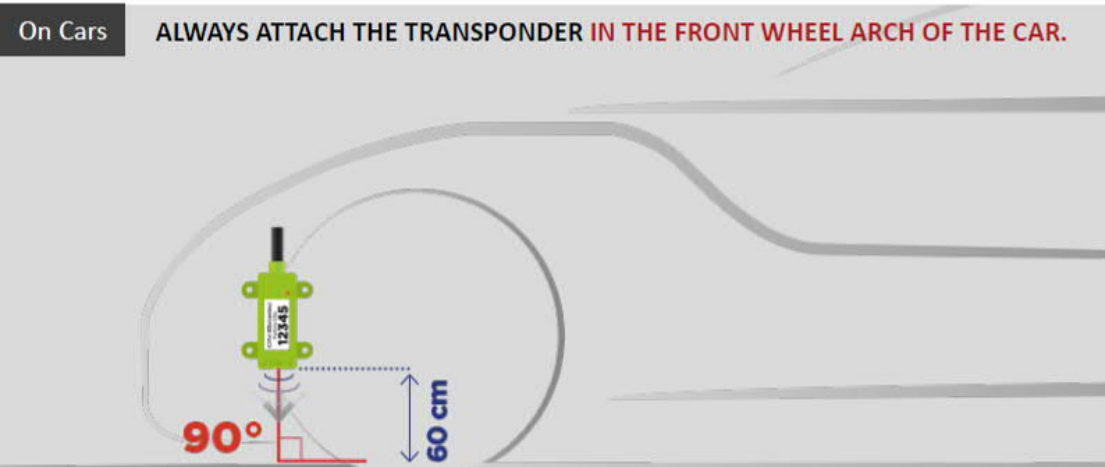

Always put the transponder **90° to the ground**
(the arrows in the direction of the track, as shown).

All other direction, angle, bracket or mounting area
used, would lead to the risk of non-detection when
switching on the timing loop.